


Otis Glide® P Electrical
Interface Assembly

Spare Parts Leaflet

23-AAA24430AD

February 22, 2017 / Page 1 of 3

23 **A-AAA24430AD**

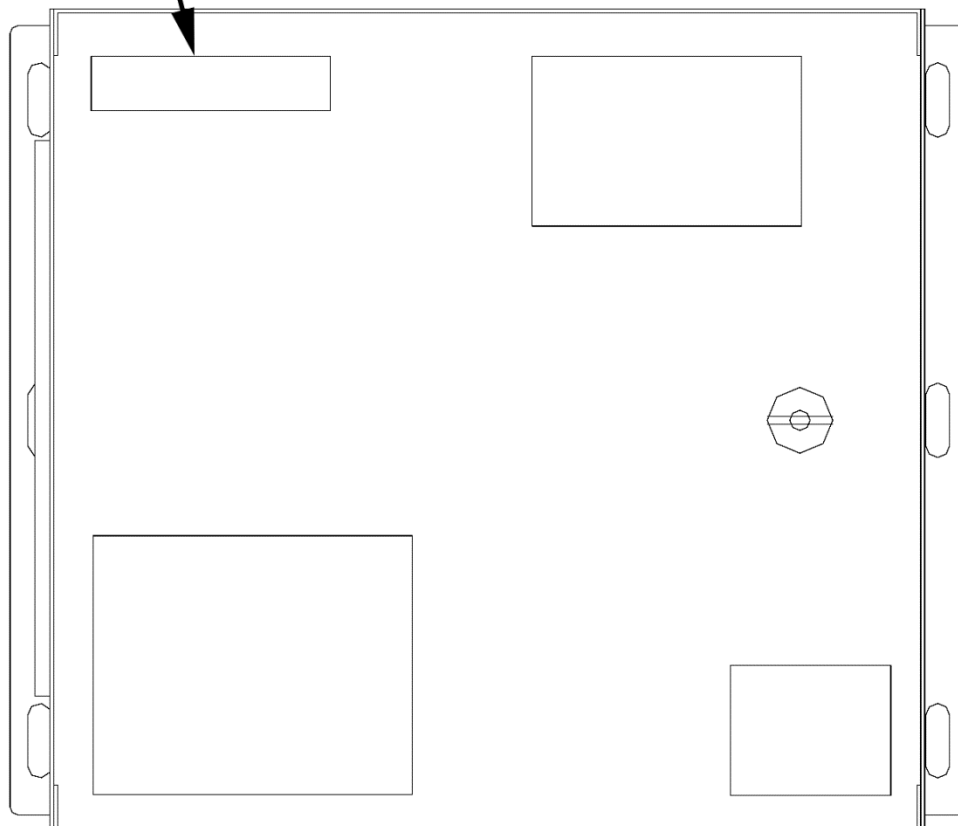

OTIS

This document does not contain any
technical data subject to EAR or ITAR

SERVICE ENGINEERING

Otis Elevator Company

Bloomfield, Connecticut USA

Unpublished Work—© Otis Elevator Co.; 2017

Leaflet Description

This leaflet provides information for the Otis Glide® P interface assembly unit. The interface assembly is used to interface the Otis Glide® P door operator on vintage controllers and systems that require the NSAA discrete interface.

Leaflet Revisions

Date Revised	Subject Matter Expert	Reason for Revision
July 3, 2013	Sohaib Shaikh	New SPL
May 14, 2014	Sohaib Shaikh	Changed reference from TIP 22.17-1 to 22.17.3-1 below.
February 22, 2017	Sohaib Shaikh	Updated history page to change the reference from TIP 22.17.3-1 to TIP 22.17.2-9; Added p/n AAA26800AWG2 on p. 3

Related Drawings

Drawing No.	Title	Drawing No.	Title
A_A24430AD	Glide Interface Assembly	A_A24430AE	Glide Power Supply Assembly
A_A26800AWG	Glide Interface PCBA	A_A24430AF	Glide Open Order Kits

Related Documents

Document ID	Title
TIP 22.17.2-9	<i>Otis Glide® P Open Order Upgrade</i>

Subject Matter Expert


Name	Department
Sohaib Shaikh	OSC Electrical Engineering

About Spare Parts Leaflets...

This document lists the lowest replaceable units (LRUs) for the standard version of the product. The LRUs are chosen by a team of Otis associates representing engineering and manufacturing.

While goal of this document is to make parts identification as easy as possible, the document cannot be all-inclusive. Elevator and escalator contracts classified as “special” or “custom” are not addressed here. For such contracts, please refer to specified information, the contract folder, TIPs, Field Education Articles, Construction Letters, etc. for further information.

If you have any suggestions about this document, please contact the subject matter expert listed on this page.

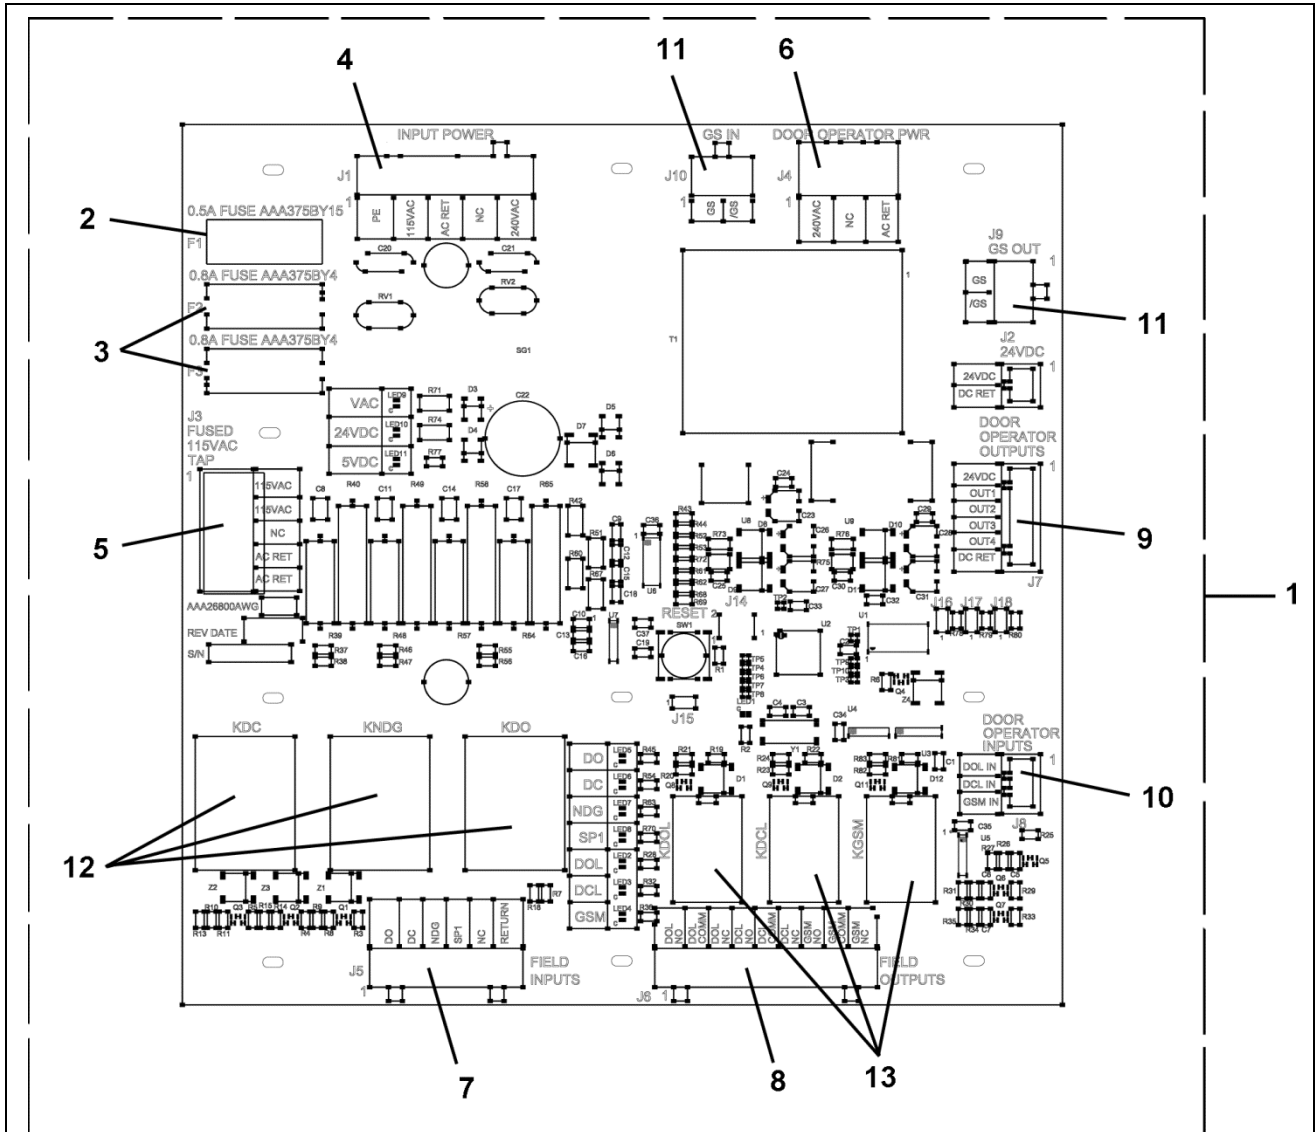

REF. No.	PART No.	DESCRIPTION
	AAA24430AD	
1	AAA26800AWG1	Assembly, Otis Glide® P Interface PCBA for 3-Wire Interface
	AAA26800AWG2	Assembly, O tis Glide® P Interface PCBA for NSAA Discrete Interface
2	AAA375BY15	Fuse, 0.5A
3	AAA375BY4	Fuse, 0.8A
4	AAA447AP91	Plug, Female, 5-position, 7.5 mm for Connector J1
5	AAA176HH52	Plug, Male, 5-Position, 5 mm for Connector J3
6	AAA176HH40	Plug, Male, 3-Position, 7.5 mm for Connector J4
7	AAA447AP70	Plug, Female, 6-Position, 5 mm for Connector J5
8	AAA447AP73	Plug, Female, 9-position, 5 mm for Connector J6
9	AAA447AP233	Plug, Female, 6-Position, 3.5 mm for Connector J7
10	AAA447AP236	Plug, Female, 3-Position, 3.5 mm for Connector J8
11	AAA447AP66	Plug, Female, 2-Position, 5 mm for Connectors J9 and J10
12	AAA613CZ9	Relay, 120 VAC Coil, 4NO, 4NC Contact
13	AAA613DC13	Relay, 24 VDC Coil, 1NO, 1NC Contact