


C-959G - Type 9D (6248) Brakes DC

February 1, 1965

Page 1

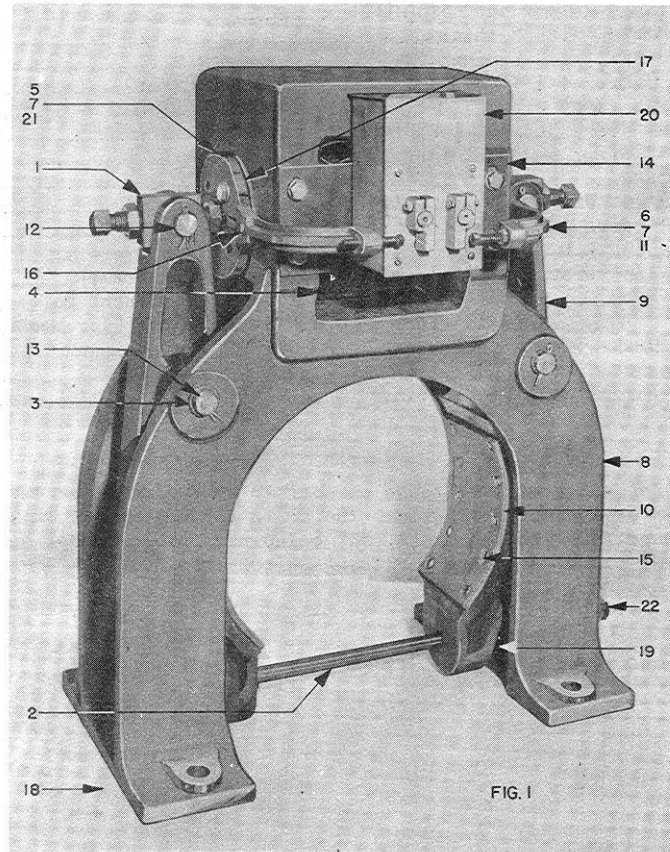

## C-959G - Type 9D (6248) Brakes DC

Page 2

### PARTS FOR BRAKE - FIG. 1 (ILLUSTRATED ON PAGE 1)

ML 6248F1 & 2: With Brake Switch  
ML 6248F3 & 4: Without Brake Switch

Ref. No.	Part No.	Description	ML & Quantity			
			6248F-			
			1	2	3	4
1	65GA4	Bolt, Eye (for Core)	2	2	2	2
2	60D46	Bolt, Sq. Hd. Machine, 5/8" dia., 18" long (for Lever)	1	1	1	1
3	335E68	Bushing, Oil-less, 7/8" ID, 1-1/8" OD, 1/2" long (for Frame)	4	4	4	4
4	*	Coil, Brake	x	x	x	x
5	400DH3	Core, Magnet, with Cover and Eye Bolt		1	1	-
5**	400DH2	Core, Magnet, with Cover and Eye Bolt	-	-	1	1
6	400DJ3	Core, Magnet, with Cover, Eye Bolt and Pin	1	1	-	-
6**	400DJ2	Core, Magnet, with Cover, Eye Bolt and Pin	-	-	1	1
7	346ABK2	Cover (for #400DH3 and #400DJ3)	2	2	-	-
7**	346ABK5	Cover (for #400DH2 and #400DJ2)	-	-	2	2
8	374LJ2	Frame, Brake, with Bushings	1	1	1	1
9	286AJ3	Lever, Brake, with Lining	2	2	2	2
10	416AH3	Lining, Brake, 4-1/4" wide, 7-9/16" long (for Lever)	2	2	2	2
11	81BM1	Pin, Guide, 1/2" dia., 1-3/8" long (for Core #400DJ2 & 3)	1	1	1	1
12	82R3	Pin, 7/8" dia., 3-1/16" long (Eye Bolt to Lever)	2	2	2	2
13	82A16	Pin, 7/8" dia., 6-13/16" long (Lever to Frame)	2	2	2	2
14	102CX1	Plate, Base	1	1	1	1
15	145C2	Rivet, 3/16" dia., 3/4" long (for Lining)	20	20	20	20
16	96R6	Rod, 3/8" dia., 2" long (for Frame)	2	2	-	-
17	255CK2	Shim, 3-5/8" ID, 4-1/2" OD, .008" thick (for Cover)	26	26	26	26
18	255HA4	Shim, 2-7/8" wide, 3-5/8" long, .0149" thick (for Frame)	48	48	48	48
19	90ZC3	Spring, 2" OD, 5-1/8" long, 9 active turns (for Mach. Bolt)	1	-	1	-
19	90AD10	Spring, 2" OD, 5-15/16" long, 10-1/2 active turns (for Mach. Bolt)	-	1	-	1
20	6931A1	Switch, Brake (for details, see Leaflet C-1008)	x	x	x	x
21	136R11	Tube, Magnet Core	1	1	1	1
22***	133A11	Washer, Spring Seat (for Spring)	1	1	1	1


\* When ordering, give part number which will be found on Coil to be replaced; or give Controller Serial Number and Elevator Sales Number.

\*\* Same as illustrated, except covers are without switch arms.

\*\*\* Arrow indicates location, the parts themselves not showing in the illustration.

X This material is used in connection with the Brake, but being a variable cannot be specified on the brake material list.

C-959G - Type 9D (6248) Brakes DC

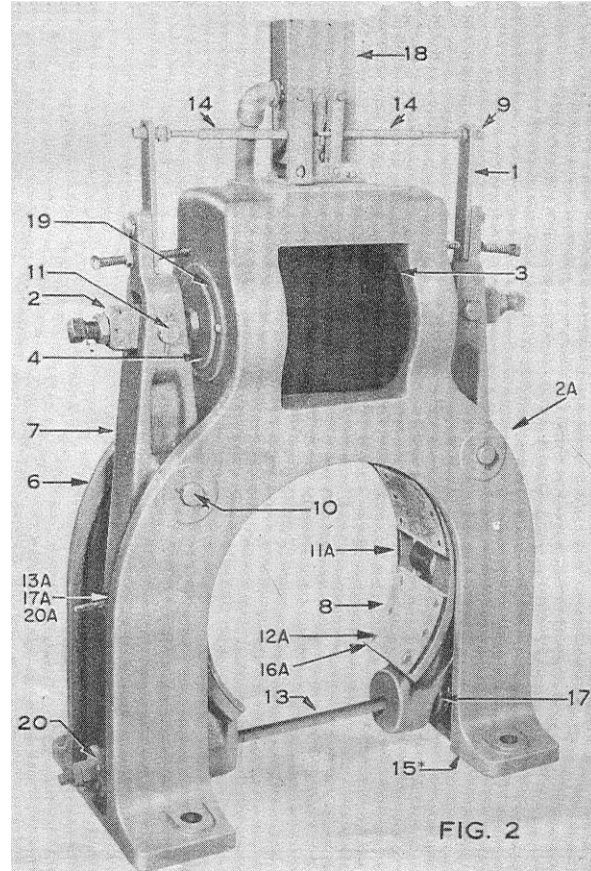



**C-959G - Type 9D (6248) Brakes DC**

Fig. No.	Ref. No.	Part No.	Description	Material List and Quantity																	
				6248-								D6248-		E6248-			G6248-	6248-			B6248-
				A6	A7	A8	A9	A10	A11	A13	A14	A3	A4	A3	A4	A5	A8	D1	D2	D3	D3
2	11	82R3	Pin, 3-1/8" long (Eye Bolt to Shoe)	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2	11A*	78P6	Pin, 4-1/4" long (Lever to Shoe)	2	2	2	2	2	2	2	2	-	-	-	-	-	2	-	-	2	2
-	-	386AAW1	Plate, Magnet Coil Cover	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	2	2	2
2	12A	145C2	Rivet, 3/16" diam., 3/4" long (for Lining)	24	24	24	24	24	24	24	24	-	-	-	-	-	24	-	-	24	24
2	12A	145C3	Rivet, 3/16" diam., 7/8" long (for Lining)	-	-	-	-	-	-	-	-	24	24	24	24	24	-	24	24	-	-
2	13	96H7	Rod, Brake Spring, 23-1/2" long	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	13A	96H119	Rod, Brake Spring, Adjusting	2	2	2	2	2	2	2	2	-	-	-	-	-	2	-	-	2	2
2	14	95AG2	Rod, Switch Operating	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2	15*	255HA4	Shim (for Brake Frame)	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16
2	16A	415E1	Shoe, Brake, with Lining	2	2	2	2	2	2	2	2	-	-	-	-	-	2	-	-	2	2
2	17	90ZC3	Spring, Brake, 5-1/8" long	2	-	2	2	-	2	-	2	2	2	2	-	2	2	-	2	2	2
2	17	90AD10	Spring, Brake, 5-15/16" long	-	2	-	-	2	-	-	2	-	-	-	-	2	-	-	2	-	-
2	17A*	90XB2	Spring, Brake Shoe Adjusting, 1-1/2" long	2	2	2	2	2	2	2	2	-	-	-	-	-	2	-	-	2	2
2	18	6098AL	Switch, Brake For details, see Leaflet C-919.	x	x	x	x	x	x	x	x	x	x	x	x	x	x	-	-	-	-
2	18	6098BZ	Switch, Brake (Explosion Proof) For details, see Leaflet C-919.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	x	x	x	x
2	19	136R3	Tube, Magnet Core	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	20	133AH1	Washer, Spring, 3/4" ID	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2	20A	133E8	Washer, Spring, 11/32" ID (for Rod)	2	2	2	2	2	2	2	2	-	-	-	-	-	2	-	-	2	2

\* Arrow indicates location, the parts themselves not showing in the illustration.

\*\* When ordering, give part number which will be found on part to be replaced; or give Controller Serial Number and Elevator Sales Number.

\*\*\* For a period of about 5 years (1952 - 1957) these one-place levers were being replaced by Swivel Shoe Type. Now the one-place levers are again available. When ordering be sure to check whether one-place or Swivel Show Type is required.

## C-959G - Type 9D (6248) Brakes DC

### Page 4

f *For details, see Leaflet C-957.*

x *Thus material is used in connection with the Brake, but being a variable, cannot be specified on brake material list.*

*NOTE: An outlet is furnished on top of the Brake Frame when the Brake is not equipped with Rectifier or Switch.*