



**Push Button
Luxury
Micro Motion III**

Spare Parts Leaflet

32-AAA323DY

December 11, 2024 / Page 1 of 5

**W/O
VINTAGE**

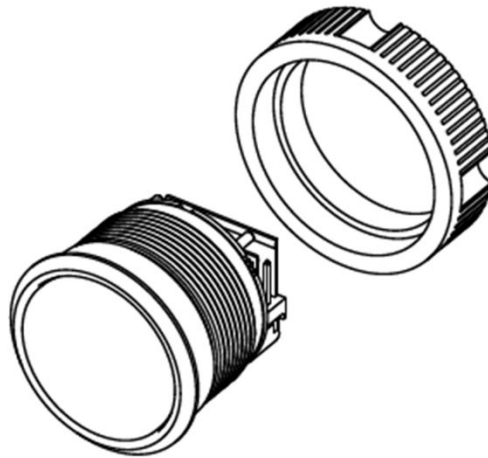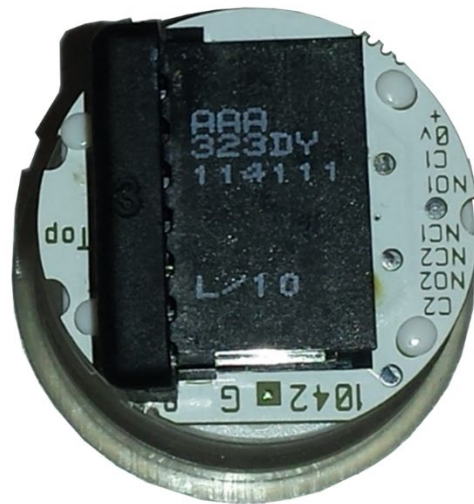

OTIS

This document does not contain any technical data subject to EAR or ITAR

SERVICE ENGINEERING

Otis Elevator Company

Bloomfield, Connecticut USA

Unpublished Work—© Otis Elevator Co.; 2024

Leaflet Description

This leaflet provides information for the new type AAA323DY buttons. These buttons replace the obsolete type AAA23500BY buttons. These buttons come in either a screw connection or 8 pin Amp connection terminal. All standard voltages: 6, 12, 24, 30 volt and 120-volt AC and DC.

Leaflet Revisions

Date Revised	Subject Matter Expert	Reason for Revision
November 4, 2020	Joseph Zych	New SPL
December 2, 2020	Joseph Zych	Updated Step 5 on p. 4
June 2, 2021	Vadzim Fedarenka	Updated Step 3 on p. 4
March 30, 2022	Vadzim Fedarenka	Updated Step 3 on p. 4
December 11, 2024	Vadzim Fedarenka	Added 6 & 12 V to screw terminal type in table (step 3) on p. 4; added note on p. 4.

Related Drawings

Drawing No.	Title	Drawing No.	Title
AAA323DY	Push Button, Micro Motion III	AAA174YL	Wiring Adapter

Related Documents

Document ID	Title
---	---

Subject Matter Expert

Name	Department
Aayush Desai & Vadzim Fedarenka	OSC Service Engineering

About Spare Parts Leaflets...

This document lists the lowest replaceable units (LRUs) for the standard version of the product. The LRUs are chosen by a team of Otis associates representing engineering and manufacturing.

While goal of this document is to make parts identification as easy as possible, the document cannot be all-inclusive. Elevator and escalator contracts classified as "special" or "custom" are not addressed here. For such contracts, please refer to specified information, the contract folder, TIPs, Field Education Articles, Construction Letters, etc. for further information.

If you have any suggestions about this document, please contact the subject matter expert listed on this page.

Ordering Instructions for AAA323DY Micro Motion III Push Buttons

32-AAA323DY

Part numbers for buttons are located on the bottom of each part as shown in photos below.

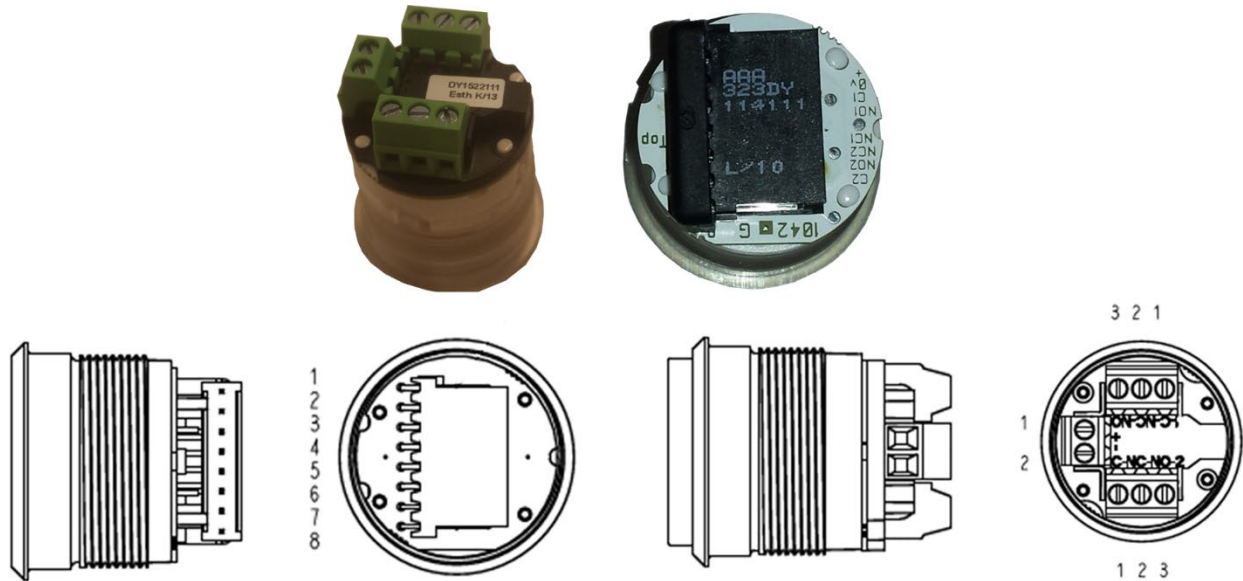


Figure 1


Figure 2

- Type AAA323DY micro-motion III pushbuttons come in two configurations:
 - Pushbuttons used with AMP connector (Figure1)
 - Pushbuttons used with screw connector (Figure 2)
- Order FAA72N1 locking nut separately, because it is not provided with buttons.
- The available four finishes are:
 - FS4/SS4 (brushed stainless)
 - SS8 (mirror stainless)
 - BR7 (brushed brass)
 - BR8 (mirror brass)
 - BT (bronze tint)

Ordering Instructions

32-AAA323DY

Part Number Specifying Method

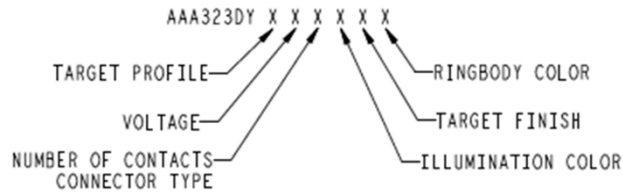

Step 1: Select the target profile.
Example: AAA323DY1 = Flat Flush Target

#	Target Profile
1	Flat Flush
2	Flat Projecting
3	Concave Flush
4	Concave Projecting

Step 2: Select the needed voltage for the button.
Example: AAA323DY14 = 30 VDC

#	Voltage
1	6 VDC
2	12 VDC
3	24 VDC
4	30 VDC
5	120 VAC/DC

Step 3: Select the number of contacts and terminal connector.
Example: AAA323DY141 = 1 contact and screw connection

#	# of Contacts	Terminal Type
1	1 Contact	Screw Terminal 6, 12, 24, 30, & 120 Volt Only
2	2 Contacts	
3	1 Contacts	HE13 AMP Terminal 6 & 12 Volt Only
4	2 Contacts	
5	1 Contact	Screw Terminal 14AWG Compliant; Available with Non-Illuminating Version Only

Step 4: Select the illumination color the button needs to light up.
Example: AAA323DY1415 = Blue LED

#	Ring Body Illumination Color
1	Red LED
2	Amber LED
3	Yellow Green LED
4	True Green LED
5	Blue LED
6	White LED
7	Not illuminating

Step 5: Select the button finish.
Example: AAA323DY14151 = FS4/SS4 Brushed Stainless Steel

#	Target Finish
1	FS4/SS4 (brushed stainless)
2	SS8 (mirror stainless)
3	BR7 (brushed brass)
4	BR8 (mirror brass)
5	BT (bronze tint)

Step 6: Select the ring body color.
Example: AAA323DY141511 = Clear ring body


#	Ring Body Color
1	Clear
2	Yellow
3	White

Final part number is AAA323DY141511

NOTE: 2-Contact HE13 AMP terminal pushbuttons can be used as service replacement of 1-contact HE13 AMP terminal pushbuttons.

Electrical Wiring Adapter Cable

32-AAA323DY

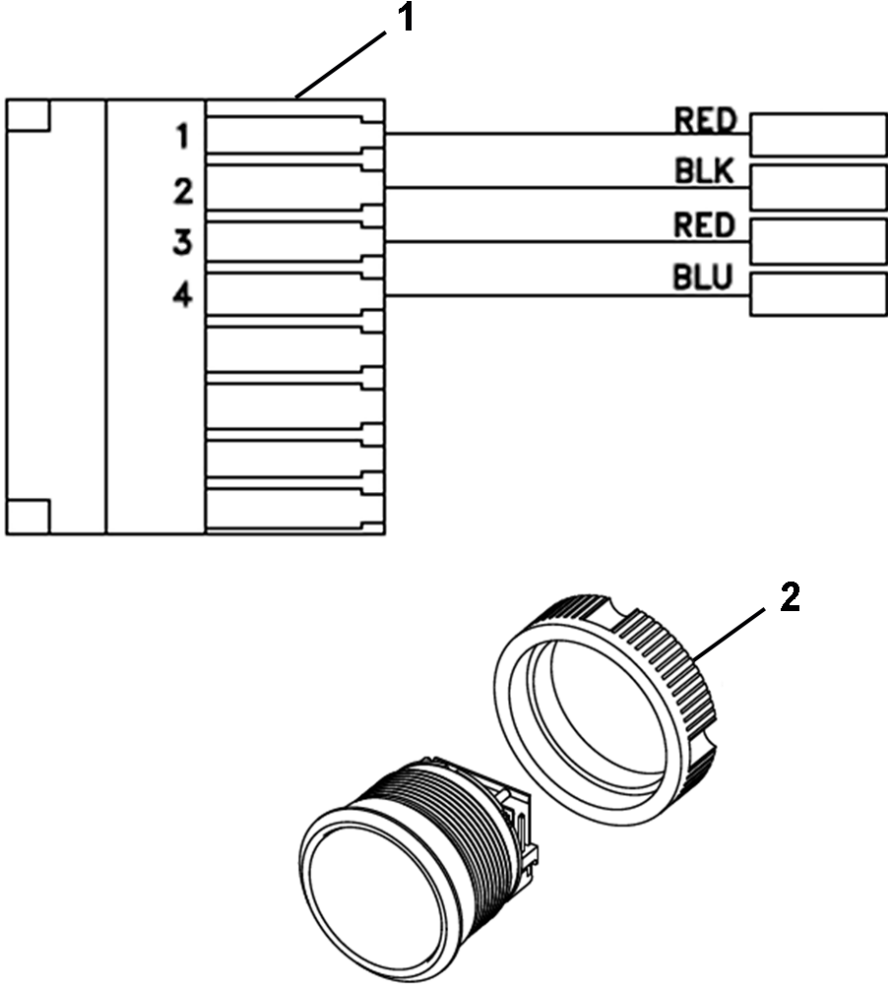

NOTE: Cable to connect 8-pin Amp connector buttons only.

W/O VINTAGE		
REF.	PART No.	DESCRIPTION
1	AAA174YL23	Cable, Electrical Wiring Adapter, Length 7.8 in. (200 mm)
2	FAA72N1	Nut, Fixing